


**OTX-005+
OUTDOOR BROADBAND
TRANSMITTER**

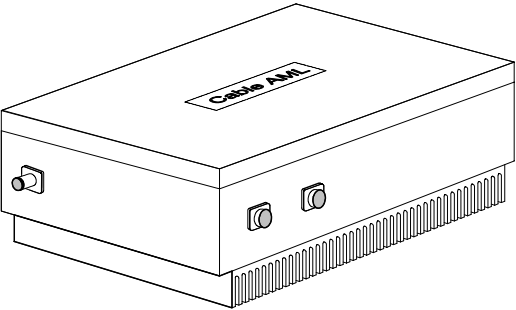

- ◆ **Broadband Transmitter with 80 Channel Capability**
- ◆ **Can Feed One link of 14 Miles or Four links of 9 miles each with 40 Channel Loading**
- ◆ **Outdoor, Modular Design**
- ◆ **Option remote diagnostics (PC Compatible)**
- ◆ **Digital Ready**

PRODUCT APPLICATION:

The OTX-005+ Transmitter is an outdoor, solid state, broadband transmitter designed to implement high quality, cost-effective microwave links for transporting up to 80 television channels.


This transmitter can be used to feed a single link, or several links simultaneously. A typical application example would be a single 14-mile (22.4 km) link

with 40 channel loading, or four simultaneous links of 9 miles (13.4 kilometers) each.

The OTX-005+ features operating diagnostics such as output signal level monitoring, phase-lock status and power supply voltages. Remote diagnostics monitoring is offered as an option.

The transmitter incorporates an Automatic Gain Control (AGC) circuit for gain control over its operating temperature range, and a State-of-the-Art, low-noise, crystal-controlled reference oscillator and solid state, GaAs power amplifier for best reliability and performance.

The OTX-005+ delivers power without compromising reliability by keeping the power amplifier operating temperature below recommended limits by means of linearization techniques with a proven performance record.

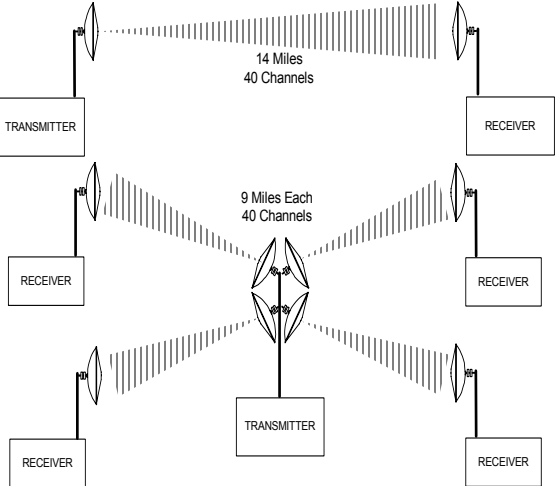

OTX-005+

Input Frequency:	54 to 550 MHz																		
Input Level (60 channel loading):	+10 dBmV (-39 dBm per channel)																		
Output Frequency ² :	12.7 to 13.25 GHz																		
Output Level for 65 dB C/CTB :	<table border="1"> <thead> <tr> <th>Channels</th> <th>dBm/Channel</th> <th>C/N (dB)</th> </tr> </thead> <tbody> <tr> <td>12</td> <td>5.5</td> <td>66.0</td> </tr> <tr> <td>21</td> <td>3.0</td> <td>63.5</td> </tr> <tr> <td>35</td> <td>0.5</td> <td>61.0</td> </tr> <tr> <td>60</td> <td>-2.0</td> <td>58.5</td> </tr> <tr> <td>80</td> <td>-3.5</td> <td>57.0</td> </tr> </tbody> </table>	Channels	dBm/Channel	C/N (dB)	12	5.5	66.0	21	3.0	63.5	35	0.5	61.0	60	-2.0	58.5	80	-3.5	57.0
	Channels	dBm/Channel	C/N (dB)																
	12	5.5	66.0																
	21	3.0	63.5																
	35	0.5	61.0																
	60	-2.0	58.5																
80	-3.5	57.0																	
Nominal Gain ³	38 dB																		
Frequency Response:	±1 dB																		
Frequency Stability:	0.0005%																		
Input Return Loss:	15 dB																		
Input Connector:	Type "F"																		
Output Return Loss:	18 dB																		
Output Connector:	WR-75 Waveguide																		
Temperature Range:	-40° to 120°F (-40° to 49°C)																		
Humidity:	100% max.																		
Primary Power:	60/120/240 VAC @ 50/60Hz or 12/24 VDC (per customer spec)																		
Power Consumption:	100 VA RMS																		
Weight:	50 lbs. (22.7 kg)																		
Dimensions:	16"H x 13"W x 7"D (40.6 x 33 x 17.8 cm)																		

¹ Specifications subject to change without prior notice.

² For Group C. Other frequencies available

³ Gain may be varied with 10 dB attenuator.