

## ITX-005 INDOOR BROADBAND TRANSMITTER



- **Broadband Transmitter with 80 Channel Capability**
- **Can Feed One Link of 10 Miles or Four Links of 6 Miles each with 40 Channel Loading**
- **Upgradeable, Modular Design**
- **Requires only 7 inches of Indoor Rack Space**
- **Digital Ready**

### PRODUCT APPLICATION:


The ITX-005 is a solid state broadband transmitter designed to implement high quality, cost-effective microwave links for transporting up to 80 television channels.

This transmitter can be used to feed a single link or several links simultaneously. A typical application example would be a single 10-mile (16 kilometer) link with 40 channel loading, or 4 simultaneous links of 6 miles (10 kilometers) each.

The ITX-005 is rack mounted for convenience and ease of access to components. It incorporates the latest Gallium Arsenide power amplifier technology to deliver a clean, reliable signal.

Output signal monitoring and diagnostic measurements are available locally or remotely via Internet.

Designed for many years of trouble-free operation, the ITX-005 can be field upgraded to higher power units of the ITX solid state family of transmitters.

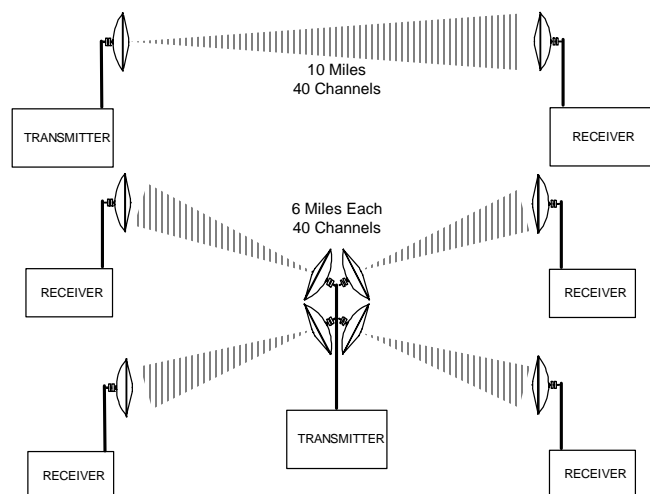

**ITX-005**

<b>Transmitter</b>																			
Input Frequency <sup>2</sup> :	54 to 550 MHz																		
Nominal Input Level for 12 TV:	+13 dBmV (-36 dBm per channel)																		
Output Frequency <sup>2</sup> :	12.7 to 13.25 GHz																		
Output Level for 65 dB C/CTB:	<table border="1"> <thead> <tr> <th>Channels</th> <th>dBm/Channel</th> <th>C/N (dB)</th> </tr> </thead> <tbody> <tr> <td>12</td> <td>2.0</td> <td>65.0</td> </tr> <tr> <td>21</td> <td>-0.5</td> <td>62.5</td> </tr> <tr> <td>35</td> <td>-3.0</td> <td>60.0</td> </tr> <tr> <td>60</td> <td>-5.5</td> <td>57.5</td> </tr> <tr> <td>80</td> <td>-7.0</td> <td>56.0</td> </tr> </tbody> </table>	Channels	dBm/Channel	C/N (dB)	12	2.0	65.0	21	-0.5	62.5	35	-3.0	60.0	60	-5.5	57.5	80	-7.0	56.0
	Channels	dBm/Channel	C/N (dB)																
	12	2.0	65.0																
	21	-0.5	62.5																
	35	-3.0	60.0																
	60	-5.5	57.5																
80	-7.0	56.0																	
Normal Gain <sup>3</sup> :	32 dB																		
Frequency Response:	±1 dB																		
Frequency Stability:	0.0005%																		
Input Return Loss:	15 dB																		
Input Connector:	Type "F" Female																		
Output Return Loss:	18 dB																		
RF Output Connector:	WR-75 Waveguide																		
Temperature Range:	60° to 100°F (16° to 32°C)																		
Humidity	95% max.																		
Primary Power:	120/240 VAC, 50/60Hz (per customer specification)																		
Power Consumption:	250 VA RMS																		
Mounting:	19" EIA Standard Relay Rack																		
Weight:	30.0 lb. (13.6 kg)																		
Dimensions:	19" W x 7" H x 20" D (48.26cm W x 17.78cm H x 50.88cm D)																		

<sup>1</sup> Specifications subject to change without prior notice.

<sup>2</sup> For Group C. Other frequencies available.

<sup>3</sup> Gain may be varied with 10dB attenuator.